




The CH 32 is a bi-colour Halo ring which includes a touch pad switch. It's designed specifically to be used with the Clockaudio through table microphone range.

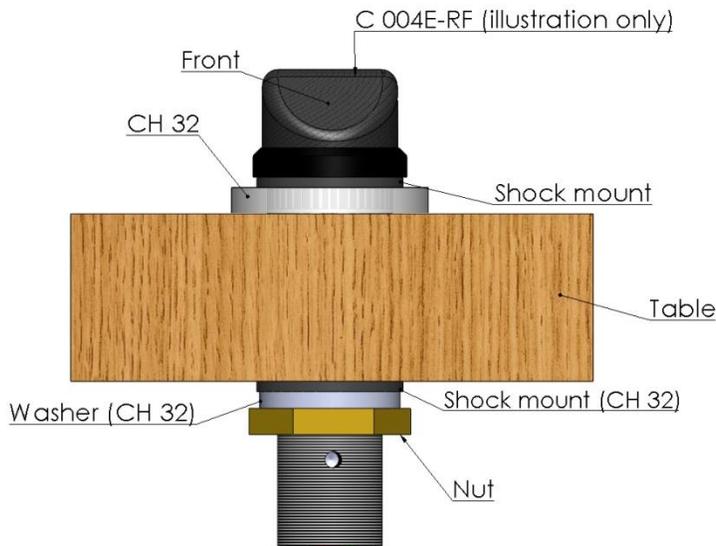



- The switch can be programmed to operate PTT, PTM or latching via a DSP**
- Available in smoked (CH 32) or white (CH 32W) finish.
- Housing 32 LED's providing top and side illumination (CH 32 side illumination only)
- 12V dc operation using **regulated** power supply
- Current consumption 60mA
- Retro fitting to Clockaudio C 003E-RF, C 004E-RF, C 011E-RF, C 012E-RF microphones, SM 10 and SM 20-RF stands.
- Fitted with 5 x 200mm cable
- Supplied with RJ 45 connector, 1 x shock mount, 1 x white nylon washer and RJ 45 through coupler



Cable colour	Function	RJ 45 Pin number
Red	Red LED	2
Blue	-ve switch	3
Brown	+ve 12V dc switch	4
Yellow	Switch Logic control	5
Green	Green LED	6



Please refer to dsp installation manuals available from our website search CH 32 and click on technical downloads tab.

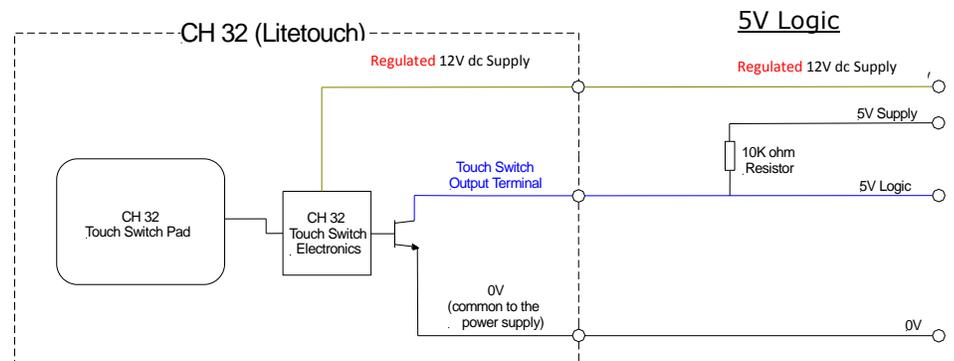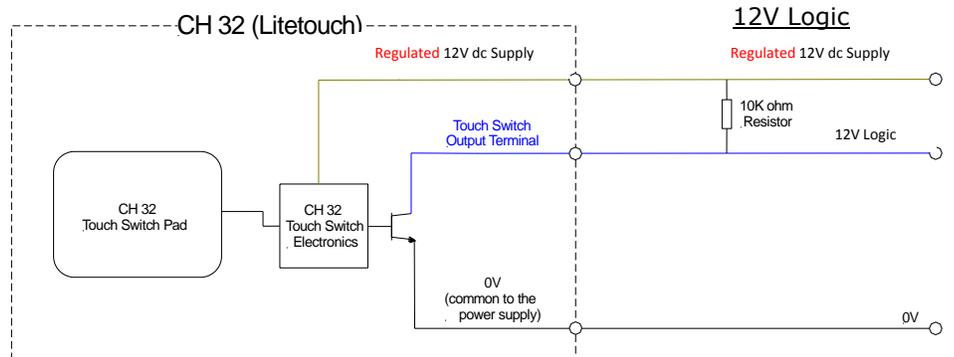

** see glossary