

Installation guide

We recommend that the installation is carried out by 2 competent persons

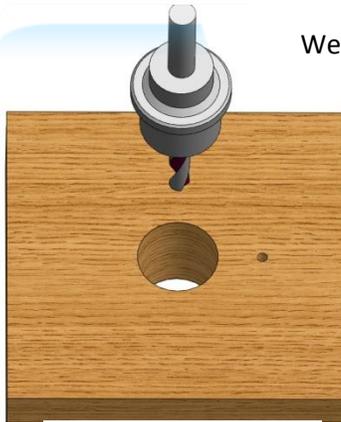


Fig A

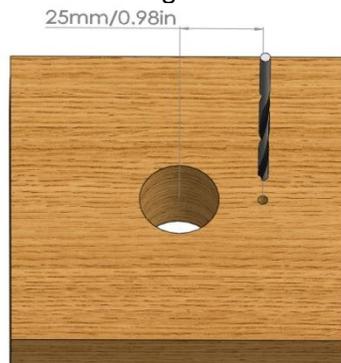


Fig B

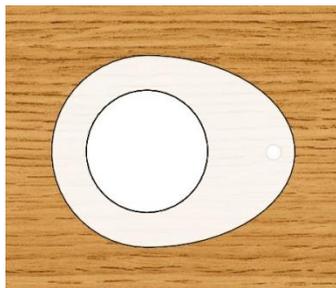


Fig C



Fig D

- 1) Drill a 24mm (0.95") hole through the table see fig A.
- 2) Using cut out template supplied drill a 3mm (0.12") hole at least 6mm (0.24") into table see fig B.
- 3) Place CH 32 into position see fig C.
- 4) Remove nut and the lower shock mount from the through table microphone and fit into CH 32 see fig D.
- 5) Line up the front of the microphone with front of CH 32 see fig E.
- 6) Using the shock mount (supplied with the CH 32) slide onto microphone barrel ensuring the cable sits in the recess of the shock mount see Fig F.
- 7) Push fit shock mount into table hole, it is essential that the ribbon cable is not twisted and is sitting correctly into shock mount see fig G.
- 8) Fit white nylon washer (supplied with CH 32) and nut (supplied with product) secure in place, care should be taken to not over tighten however enough tension must be used to ensure product is firmly secured. See fig H
- 9) Install complete, for wiring details see page 1 and check microphone data. See fig I



Fig E



Fig F



Fig G




Fig I

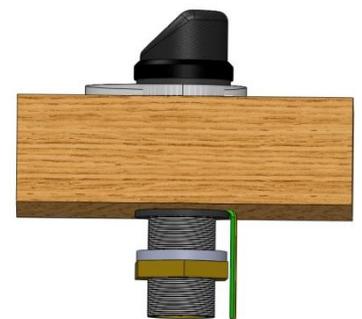


Fig H