


Providing multiple colours, the TS003 capacitive touch switch provides clear and precise visual operational status. With no moving parts, low-profile mounting and encapsulated electronics, TS003 also provides protection from office contaminants affecting its operation. Comes with modular under desk mount controller for easy install.



- Low profile mount capacitive touch switch facilitating click / pop free switching of a microphone from DSP.
- Self-calibrating.
- RGB LED provides multi-colour combination for clear precise visual status of microphone or other devices.
- No moving parts and employing surface mount technology, ensures extreme reliability, longevity and trouble free use.
- Electronic circuitry fully encapsulated to protect operation from spills or other contaminants.
- Terminated with RJ 45 connector and supplied with a touch switch controller (TS-C1) allows connection via CAT 5E patch cable back to CDT-100 or directly to DSP.
- Programmable via DSP to operate in PTT, PTM or latching modes.
- 12V DC operation using regulated power supply or CDT-100.
- Fitted with 200mm cable that connects to TS-C1's TS-IN.
- RS-IN on TS-C1 provides external switch connectivity.
- Maximum current consumption 70mA.
- Supplied with M15 nut for table fixing.
- Finished in clear polycarbonate.

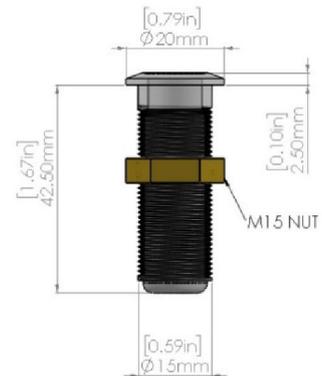

TS-OUT RJ 45 Pin number	Function
1	Switch (Low indicating contacts closed on RS-IN)
2	Red LED (pulled low to illuminate)
3	Ground
4	+ 12V DC
5	Touch Switch activated
6	Green LED (pulled low to illuminate)
7	Blue LED (pulled low to illuminate)
8	No Connection

Recommendations:

1. For Installation pre-drill 16mm/0.63" hole into table.
2. Ensure all connections are made prior to applying power.